


TRANSPARENT^{TYPE}

Transparent type level gauge consist of the body, with the glass and cover held by stud bolts to maintain a hermetic seal. The type allows observation of liquid level through two of transparent glasses, marking them applicable to colored and non-transparent liquids. For high-pressure, high-temperature or alkaline applications, a layer of high grade mica can be applied to the inner surface of the glasses, not only protecting the glasses, but improving pressure-resistance and heat-resistance.

A lighting device may also be provided for even clearer confirmation of liquid level. Ball check valve for emergency shut-off is in the gauge valve.

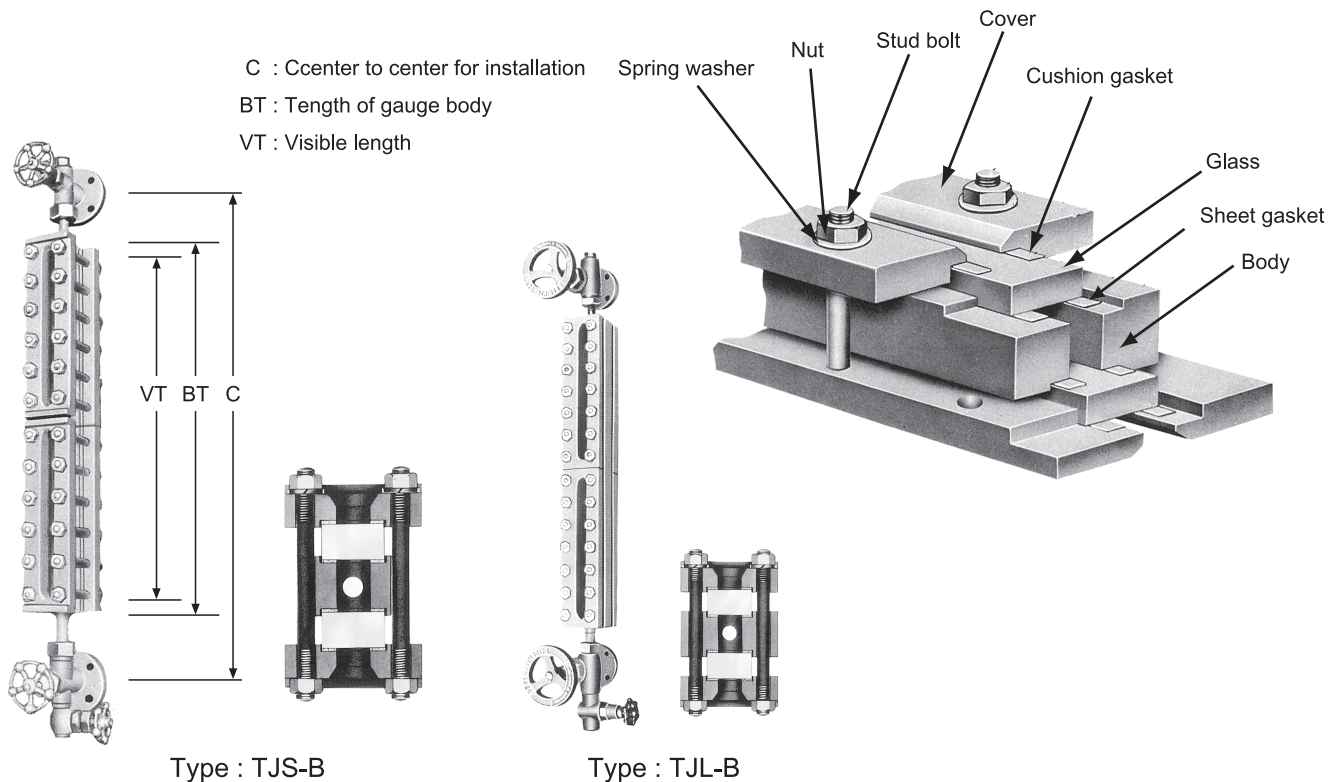

DIMENSION

unit:mm

NO	1unit			2unit			3unit			4unit			5unit			6unit			7unit			8unit		
	VT	BT	C	VT	BT	C	VT	BT	C	VT	BT	C	VT	BT	C	VT	BT	C	VT	BT	C	VT	BT	C
1	90	130	310																					
2	115	155	335																					
3	140	180	360																					
4	165	205	385	370	410	590	575	615	795	780	820	1000												
5	195	235	415	430	470	650	665	705	885	900	940	1120												
6	225	265	445	490	530	710	755	795	975	1020	1060	1240	1285	1325	1505	1550	1590	1770	1815	1855	2035			
7	255	295	475	550	590	770	845	885	1065	1140	1180	1360	1435	1475	1655	1730	1770	1950	2025	2065	2245	2320	2360	2540
S7	275	315	495	590	630	810	905	945	1125	1220	1260	1440	1535	1575	1755	1850	1890	2070	2165	2205	2385	2480	2520	2700
8	295	335	515	630	670	850	965	1005	1185	1300	1340	1520	1635	1675	1855	1970	2010	2190	2305	2345	2525	2640	2680	2860
9	315	355	535	670	710	890	1025	1065	1245	1380	1420	1600	1735	1775	1955	2090	2130	2310	2445	2485	2665	2800	2840	3020
10	375	415	595	790	830	1010	1205	1245	1425	1620	1660	1840	2035	2075	2255	2450	2490	2670	2865	2905	3085			

Glass Model no.

For long total length, please choose the desired length from Model No. 7, S7, 8, 9 or 10

For any given visible length, it is more economical to use smaller unit of larger Model No. gauge